

ACTi KCM-3911 H.264 4-Megapixel IP D/N Hemispheric Camera with ExDR




Product Name: ACTi KCM-3911 H.264 4-Megapixel IP D/N Hemispheric Camera with ExDR

Manufacturer: -

Model Number: KCM-3911

ACTi KCM-3911 H.264 4-Megapixel IP D/N Hemispheric Camera with ExDR

PHOTO INDICATION

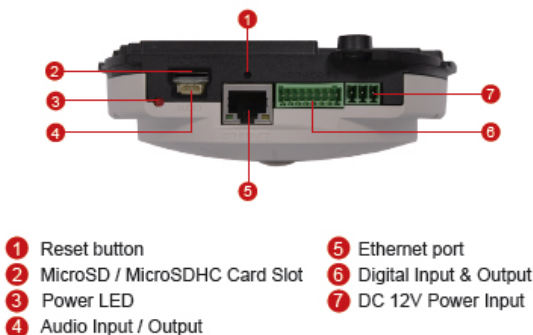

Motion Detection Preset mode

ACTi KCM-3911 at Basketball Court

The 4-Megapixel hemispheric camera KCM-3911 covers a huge basketball hall while providing important details of the people in the field of view. The floor space is 32 meters wide and 17 meters long. The camera has been installed 3.5 meters from the ground and with 1 meter distance from the white side border of the basketball court area, covering everything within the 180 degree panorama view.

Technical Specification

Device

- Device Type Hemispheric Camera
- Image Sensor Progressive Scan CMOS
- Sensor Size 1/2.5 " (5.7 x 4.28 mm)
- Day / Night Yes
- Minimum Illumination Color: 1.63 lux at F2.8 (30 IRE, 2400°K); B/W: 0.06 lux at F2.8 (30

ACTi KCM-3911 H.264 4-Megapixel IP D/N Hemispheric Camera with ExDR

IRE, 2400°K)

- Color to B/W switch ISP based switch, configurable
- Mechanical IR Cut Filter Yes
- IR Sensitivity Range 700 - 1100 nm
- IR LED No
- Electronic Shutter 1 /15 - 1/2000 sec (auto mode)

Lens

- Focal Length / Aperture Fisheye Lens, 1.05 mm / F2.8
- Iris Fixed iris
- Focus Fixed Focus
- Horizontal Viewing Angle 180°

Video

- Compression H.264, MPEG-4 SP, MJPEG Maximum Frame Rate vs.Resolution 6 fps at 2032 X 1920; 12 fps at 1920 X 1080; 12 fps at 1280 X 720; 12 fps at 640 X 480
- Mode 180° / 360° Panorama, ePTZ, 6 VGA, Motion Detection Preset
- Multi-Streaming Simultaneous dual streams based on two configurations in single view mode;
- Multiple streams based on single configuration in 6 cropped VGA mode
- Bit Rate 28 Kbps - 6 Mbps (per stream)
- Bit Rate Mode Constant, Variable
- Image Enhancement ExDR (Extreme Dynamic Range), White balance: automatic, hold and manual; Brightness; Saturation; Contrast; Edge enhancement; Automatic gain control; 2D+3D Digital noise reduction; Flickerless; Defogging
- Privacy Mask 4 configurable regionsText Overlay User defined text on video

Audio

- Compression 8 kHz, Mono, PCM, 16 bit encoding
- Audio-In Cable with 3.5mm Phone Jack
- Audio-Out Cable with 3.5mm Phone Jack

Network

- Protocol & Service TCP, UDP, HTTP, HTTPS, DHCP, PPPoE, RTP, RTSP, IPv6, DNS, DDNS, NTP, ICMP, ARP, IGMP, SMTP, FTP, UPnP, SNMP, Bonjour
- Ethernet Port 1, Ethernet (10/100 Base-T), RJ-45 connector
- Security IP address filtering; HTTPS encryption; Password protected user levels; IEEE 802.1X network access control

Alarm

- Alarm Trigger Video motion detection (3-6 regions, depending on video mode); External device through digital input
- Alarm Response Notify control center; Go to ePTZ preset point or preset tour; Change camera settings; Command other devices; E-mail notification with snapshots; Save video or snapshot to local storage; Upload video, snapshot to FTP server; Activate external device through digital output

General

ACTi KCM-3911 H.264 4-Megapixel IP D/N Hemispheric Camera with ExDR

- Power Source / Consumption PoE Class 3 (IEEE 802.3af) / 9.6W DC 12V / 7.68W (adapter not included)
- Weight 425 g (0.93 lb)
- Dimensions (W x H) 150mm x 45.32mm (5.9" x 1.8")
- Mount Type Flush, Wall, Pendant, Pole, Corner
- Operating Temperature -10 °C - 50°C (14°F - 122°F)
- Operating Humidity 10% ~ 85% RH
- Approvals CE, FCC

Integration

- Unified Solution Fully compatible with ACTi software ISV Integration Software Development Kit (SDK) available ; ONVIF compliant Firmware Access Browser Microsoft Internet Explorer 6.0 or newer

Price: £684.00
