

# Dinstar DWG2000C-8GSM VoIP Gateway



Product Name: Dinstar DWG2000C-8GSM VoIP Gateway

Manufacturer: -

Model Number: DWG2000C-8GSM

Please Note: The Dinstar DWG2000C-8GSM has been discontinued. For an alternative, we highly recommend the Dinstar DWG2000E 8-port GSM VoIP Gateway.


## Dinstar DWG2000C-8GSM VoIP Gateway

The Dinstar DWG2000C-8G is fully functioning VoIP gateway based on IP and GSM network. The Dinstar DWG2000C-8G provides a flexible network configuration, powerful features, and good voice quality. It works for carrier grade, enterprise, SOHO, residential users for cost-effective solution. It's an easy to use cost-effective gateway for call termination (VoIP to GSM) and origination (GSM to VoIP). It is fully compatible with leading softswitch and SIP server.

## Dinstar DWG2000C-8GSM VoIP Gateway Features

- PLC: Packet loss concealment
- VAD: Voice activity detection
- CNG: Comfort Noise Generation
- Local/Remote SIM card work mode
- Adjustable gain of port
- DTMF adjustment
- Balance alarm
- Lock/unlock SIM/UIM
- Mobile number display rejection
- Sending/receiving SMS
- Customize IVR Recording
- White and black list
- One number access
- Open API for SMS, support USSD
- Echo Cancellation (with ITU-T G.168/165 standard)
- Automatic negotiate network
- Hotline
- BCCH

# Dinstar DWG2000C-8GSM VoIP Gateway

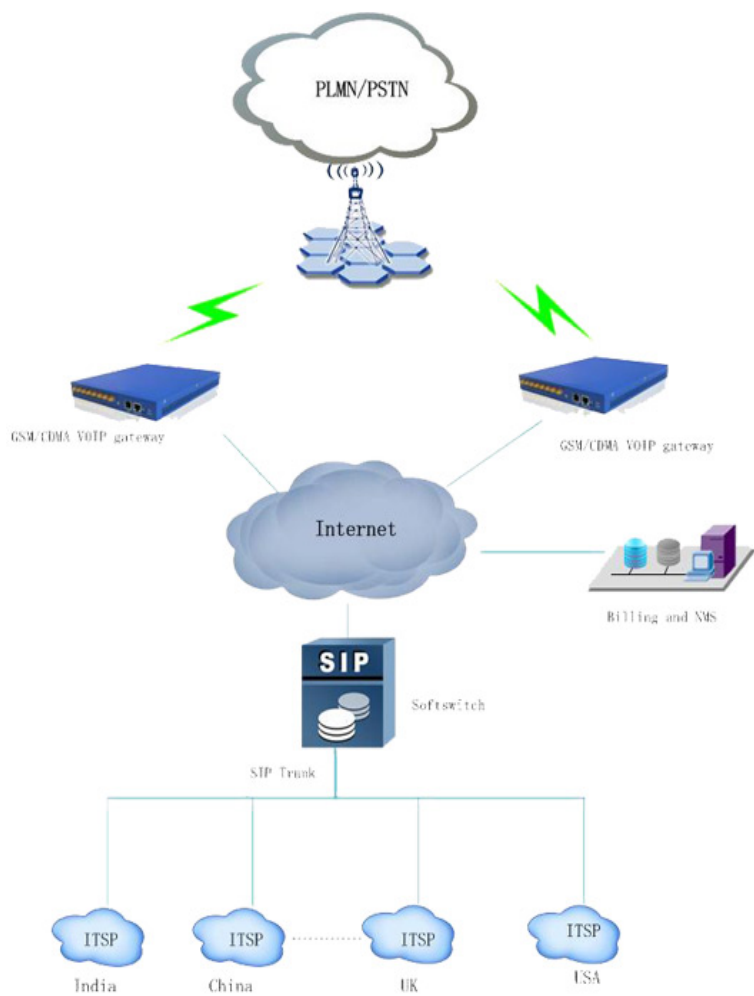

## Technical Specification

### Dimensions

- L = 255, W = 220, H = 30

### Weight

- 1.4kg

### Operation temperature(unit:°C;)

- 0~40 °C;

### Storage temperature(unit:°C;)

- -20~80 °C;

### Operation humidity

- 5%~90%

### GSM SIM ports

- 8 GSM channels

### Power supply

- 12VDC,4A

### Power Consumption

- 25W

### Network interface

- 10/100 Base-Tx, RJ45

### Number of LAN ports

- 1

### Number of console

- 1

**Please Enquire**

---