

GAI-Tronics Commander SIP Phone Yellow - 0 Button



Product Name: GAI-Tronics Commander SIP Phone Yellow - 0 Button

Manufacturer: -

Model Number: 111-02-0010-212

GAI-Tronics Commander SIP Phone Yellow - 0 Button

The GAI-Tronics Commander family of telephones are tough, weather resistant units built to withstand abuse and environmental extremes. The Commander body is moulded in glass filled polyester to prevent rust and corrosion. It is simple to install with fixings concealed from view giving increased security from vandalism.

GAI-Tronics Commander Key Features

- Standard and SMART Analogue and VoIP-SIP options available
- Vandal Resistant Handset and Cord
- Robust and weather resistant: IP65
- Full keypad, CB and 1, 3 and 6 button programmable autodialler telephones
- 2 x RJ45 Connectors as standard for VoIP
- Dual purpose design for wall or desk mounting, simple installation
- Large tactile buttons, easy to see and operate
- Inductive Coupler fitted as standard for hard of hearing
- Standard or Customised units
- Handset cord length options
- CE Compliant

Standard Analogue

The standard analogue unit provides basic telephone functions and can be connected to any standard two-wire telephone line, including FXS ports, analogue PABX lines and PSTN.

SMART Analogue

Self Monitoring And Reporting Telephone can be integrated with GAI-Tronics' TMA monitoring and maintenance software. SMART gives advanced features including remote programming, fault monitoring and call logging, all from a linepowered telephone capable of operating up to 7km from the exchange on a two-wire cable.

Voice over IP (SIP protocol)

GAI-Tronics VoIP-SIP telephones support Power over Ethernet (PoE) to combine power and connection to LAN or WAN. GAI-Tronics telephones now feature a secondary RJ45 port which allows two or more telephones to be connected in series via the network. GAI-Tronics VoIP-SIP phones offer a wealth of additional features including real-time reporting via Syslog, and can be configured by web browser.

GAI-Tronics Commander - Technical Specifications

General

- Casing Material - Glass filled polyester.
- Colours - yellow, other colours to special order
- Handset Material - Cylcoloy with stainless steel spiral cord, or curled cord
- Keypad - Weathersealed tactile digital keypad. Silicone rubber material, resistant to most chemicals and solvents
- Operating temperature - -20° C to +60° C
- Weather Resistance - Up to IP65
- Ringing Tone - Shrill warble tone 80 dBA @ 1 metre typical
- Hookswitch - Electronic / magnetic with no visible moving parts
- M.T.B.F. - Calculated to have an M.T.B.F. in excess of 50,000 hours using MIL-HDBK-217F

Notice 2

- Weight - 3 kg approx

Standard Analogue

GAI-Tronics Commander SIP Phone Yellow - 0 Button

- Dialling - LD (pulse) or MF (tone). User selectable
- Time Out - Enforces a fixed call maximum time limit to 6-8 minutes from lifting the handset. User selectable
- Power supply - Drawn from telephone line
- Lightning / Transients - Protection to ITU-T k.21 enhanced levels

Smart Analogue


All the features of the standard analogue unit plus:

- Remote programming - Auto-dial numbers, time-out and dial mode can be programmed over the phone line either from a tone phone or from monitoring software (TMA).
- Configuration - Remotely programmable via TMA
- Remote monitoring - Remote health-check and fault reporting, including handset integrity, either on a call-in or polled basis. TMA required
- Call Logging - Records call time, duration and auto-dial number used. TMA required

Voice Over IP - SIP

- Connection type - 2 x RJ45 sockets (inside sealed enclosure) as standard
- Power supply - External 24-48Vdc or Power-Over-Ethernet (PoE 802.3af compliant). Power requirement 7W max (4W idle)
- Call set-up Protocol - Session Initiation Protocol (SIP) (RFC 3261) only
- Configuration - Via configuration file or web page. Static IP address provisioning or DHCP
- External I/O - 4 auxilliary inputs, 2 isolated relay outputs, capable of switching 230Vac
- Monitoring and reporting - Real-time over TCP/IP proprietary Syslog application

Dimensions

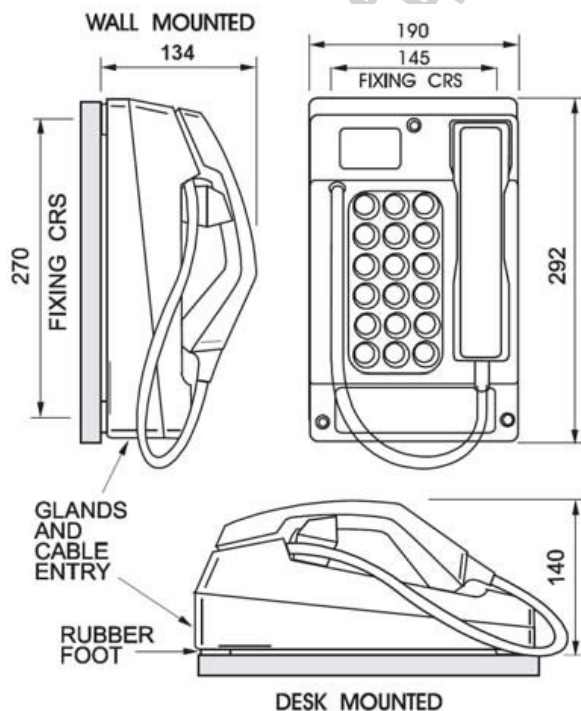

Price: £988.00

VoIPVN <http://voip.com.vn>