

OpenVox A800E11 8 Port Analog PCI Express card + 1 FXS + 1 FXO modules




Product Name: OpenVox A800E11 8 Port Analog PCI Express card + 1 FXS + 1 FXO modules

Manufacturer: OpenVox

Model Number: A800E11

OpenVox A800E11 8 Port Analog PCI Express card + 1 FXS + 1 FXO modules

Please Note: This is a PCI Express Card. Please make sure your motherboard/server is compatible with this product.

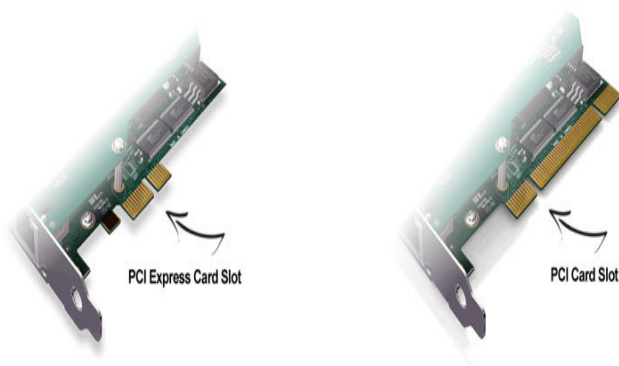

OpenVox A800E can be used for connecting analog telephones and analog POTS lines through a PC. It supports combinations of FXS and/or FXO modules for a total of 8 lines. The OpenVox A800E11 8 Port Analog PCI Express card + 1 FXS + 1 FXO modules delivers great voice quality in the telephony systems. With interchangeable FXS/FXO modules, it can eliminate the requirement for separate channel banks or access gateways. The A800E contains 8 module banks. Each bank supports one analog interface. The module banks may be filled with up to 8 FXO or FXS modules enabling the creation of any combination of ports. Scaling of an analog card solution is accomplished by simply adding additional cards. A800E works with Asterisk®, Elastix®, FreeSWITCH®, PBX in a Flash, trixbox®, Yate® and IPPBX/IVR projects as well as other Open Source and proprietary PBX, Switch, IVR, and VoIP gateway applications.

Technical Specifications

Feature Highlights of OpenVox A800E11 8 Port Analog PCI Express card + 1 FXS + 1 FXO modules

- Up to 8 Simultaneous PSTN Calls (Per PCIe Slot)
- Interchangeable FXS and FXO modules
- 3-Month "No Questions Asked" Return Policy

Target Applications

- Channel Bank Replacement / Alternative
- Small Office Home Office (SOHO) applications
- Small and Medium Business (SMB) applications
- Gateway Termination to analog telephones/lines

OpenVox A800E11 8 Port Analog PCI Express card + 1 FXS + 1 FXO modules

Services and Features

- Caller ID and Call Waiting Caller ID
- ADSI Telephones
- Loopstart Signaling Support

Technical Specifications

- Up to 8 ports through a combination of FXS and FXO modules
- 8 RJ-11 interfaces on a single PCI bracket
- PCI Express 1.0,
- Firmware accelerate I/O access to achieve high stability
- Power: 7W Minimum, 37W Maximum
- Operation temperature: 0°C to 50 °C
- Storage temperature: -40°C to 125°C
- Size: 24.8cm*10.7cm*1.8cm
- Weight: 124g

Operating Systems

- Linux (all versions, releases and distributions from 1.0 up)

Minimum Hardware Requirement

- 800-Mhz Pentium III
- 128MB RAM
- Available PCI Express Slot

Standards Compliancy & Warranty

- RoHS compliant
- Certificates: CE and FCC
- Five Year Warranty!

Certified by trixbox CE and Elastix

Price: £91.10
