

# Yealink T20E IP Phone



Product Name: Yealink T20E IP Phone

Manufacturer: Yealink


Model Number: SIP-T20E

Yealink T20E - Value Entry Level IP Phone

Please Note: The Yealink T20E has been discontinued. For an alternative, we highly recommend the Yealink T20P PoE version.

The Yealink T20E IP Phone is a competitively priced quality IP phone. It has the same functionality as the popular Yealink T20P / T20PN models including the same Auto Provisioning engine. However, as there is no POE support it is supplied as standard with a UK PSU. Yealink T20E Key Features

- 2 SIP Accounts
- 2 Line, 2x16 LCD Display
- 2 Programmable Keys
- 5 Hard Function Keys
- 3 Way Conference Calls
- Speakerphone
- Call Hold, Waiting and Transfer.
- Wall mountable

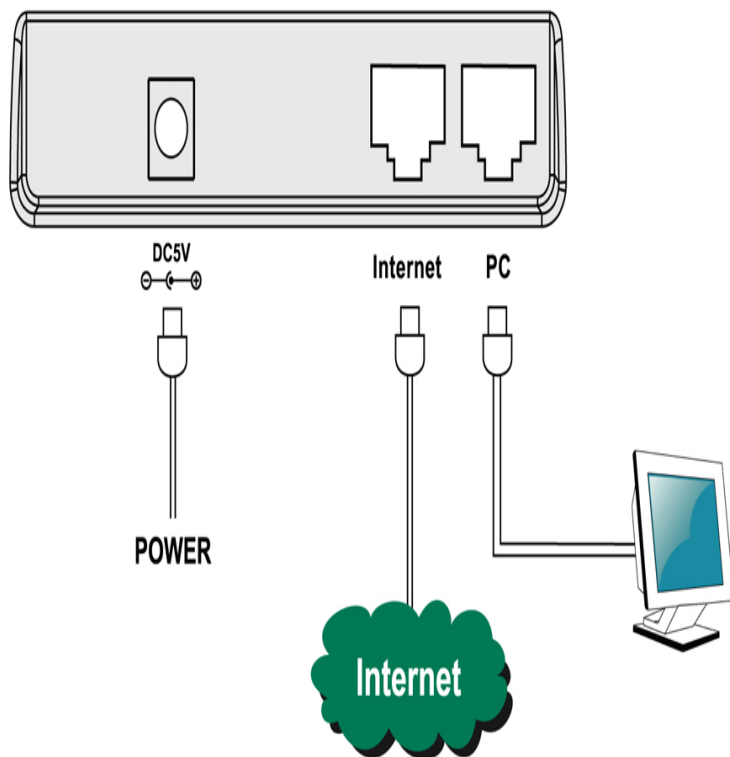

## Yealink T20E Technical Specifications

### Network Features

- SIP v1(RFC2543), v2(RFC3261)
- 3 User accounts
- NAT Transverse: STUN mode
- IP Assignment: Static/DHCP/PPPoE
- In-Band DTMF, Out-of-Band DTMF, SIP Info
- Proxy mode and Peer-to-peer SIP link mode
- TFTP/DHCP/PPPoE client
- Telnet/HTTP server
- DNS client
- NAT/DHCP server
- Support VLAN, QoS
- VPN Support

### Voice Features

- Wideband Codec: G.722, voice spectrum between 50-7000Hz
- Narrowband Codecs: G.711, G.726, G.723.1/ILBC, G.729AB and GSM VAD, CNG, AEC, PLC, AEC, AGC
- Full-duplex hands-free speakerphone

### Telephony Features

- Call Hold, Call Waiting, Call Transfer,
- Call Forward 300 name/number phonebook
- Caller ID, Call List, DND, Redial
- Flash 3-way Conference, Speed Dial
- Personal Ring Tone, Voicemail
- Volume Adjustment, Mute, Speakerphone

### IP PBX System Integration

- Dial Plan, Dial-now, Paging
- Downloadable enterprise phonebook
- Call Park, Call Pickup, Distinctive Ringtone Auto-answer, intercom

### Config, Upgrade and Usage

- OpenVPN support Firmware
- Upgrade: TFTP/Console/ Auto-provision Auto-provision: TR069, https, http, ftp, tftp, PnP
- Direct IP call without SIP proxy
- Dial number via SIP server Dial URL via SIP server

### Security

- Secure RTP
- Digest authentication using MD5/MD5-sess
- Secure configuration file via AES encryption

### TI Titan Chipset

# Yealink T20E IP Phone

- LCD: 2 Lines, 2x16
- 2 programmable keys
- 23 hard keys,
- 2 indication LEDs    Headset port:
- RJ9    Network Interface: 2xRJ45 10/100M    ports
- Dimension: 185 X 200 X 90 mm
- Net Weight: 1.22 kg    Power adapter:
- Input: AC 100~240V    Output: DC 5V/1A
- Operating humidity: 10~95%
- Storage temperature: up to 60 C

**Please Enquire**

---

VoIPVN <http://voip.com.vn>